



porta accessori integrato  
built-in  
accessory holders

battistrada  
in gomma  
rubber wheels

avvolgitubo statico  
static hose reel

interruttore rotativo a 3 posizioni  
off/Eco Speed/Full Speed  
3 positions rotative switch  
off/Eco Speed/Full Speed

sgancio tubo AP facilitato  
easy HP hose release




### Caratteristiche Generali

- Manico telescopico con avvolgitubo statico per tubo AP (6m)
- Pompa a 3 pistoni assiali comandati dal piattello oscillante, testa in alluminio
- Pistoni in acciaio inox temperato
- Valvola di sicurezza automatica con azzeramento della pressione nella testa pompa
- Motore universale con protezione termica
- Lunghezza cavo elettrico 5m

### General Features

- Two-wheel trolley with handle and hose reel (6m HP hose)
- 3 Axial stainless steel pistons wobble-plate pump
- Tempered stainless steel pistons
- Automatic by-pass valve with pump head pressure discharge
- Single-phase universal motor with thermal protector
- Electric cable length 5m

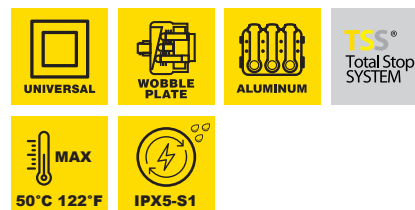

| MOD      | COD   | MAX | MAX  |     |     |     |      |       | KG NET   |      |
|----------|-------|-----|------|-----|-----|-----|------|-------|----------|------|
|          |       | bar | psi  | l/h | gph | kW  | rpm  | Hz    | V        | kg   |
| 2K X-TRA | 14992 | 160 | 2300 | 460 | 122 | 2,2 | 3400 | 50-60 | 220-240~ | 10,3 |



### Accessori standard Standard accessories

